



Przejście szczelne dla rur INCOR

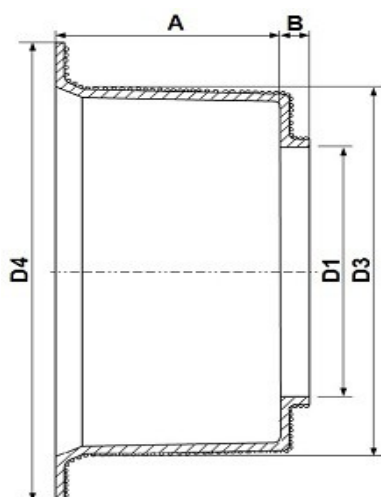

Materiał: GRP
DN 160, 250, 300, 400, 500,
600, 800, 1000

Materiał: PP
DN 200

DN	D1 ± 2	D3 ± 5	D4 ± 5	A ± 10	B ± 20
150	150	183	249	95	30
200	200	256		106	44
250	250	296	360	100	50
300	300	353	413	105	45
400	400	471	538	123	25
500	500	586	654	123	27
600	600	702	756	130	20
800	800	929	1010	193	35
1000	985	1190	1310	255	20

Materiał: PP – polipropylen

Żywica poliestrowa nienasycona zbrojona włóknem szklanym
z dodatkiem wypełniacza lub polipropylen PP

Aprobata: Instytut Badawczy Dróg i Mostów Nr. AT/2011-02-2770/1