


## Przejście szczelne dla rur PCV SN8 progowe

Materiał: GRP

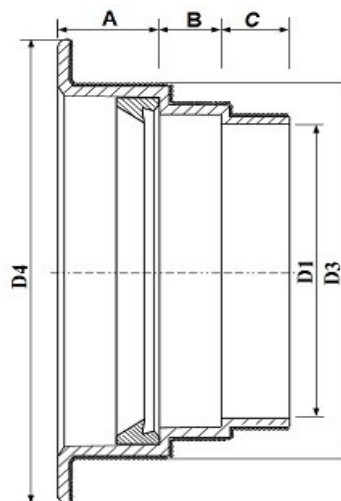

DN	D1 ± 2	D3 ± 5	D4 ± 10	A ± 5	B ± 5	C ± 5
200	188,5	241	296	70	40	45
250	237	290	355	70	40	40
300	300	357	420	70	40	40
400	382	441	508	60	52	36
500	476	541	609	60	54	34
630	600	670	725	70	50	40
800	740	847	919	70	60	45

**Materiał:** GRP - żywica poliestrowa nienasycona zbrojona włóknem szklanym z dodatkiem wypełniacza,

**Aprobata:** Instytut Badawczy Dróg i Mostów Nr. AT/2011-02-2770/1