


Przejście szczelne dla rur PROCOR PP

Materiał: GRP

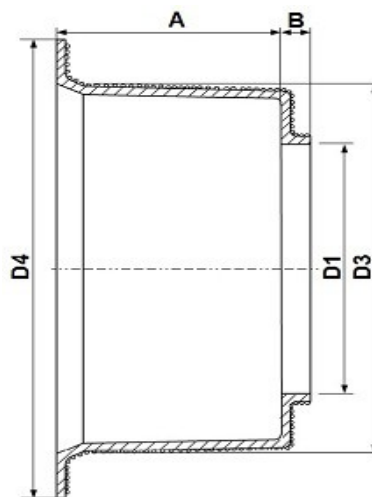

DN	D1 ± 2	D3 ± 5 średnica zewnętrzna tulei	D4 ± 5	A ± 5	B ± 5
200	200	257	310	100	50
250	250	310	365	90	20
300	300	364	435	100	50
400	400	483	549	120	20
500	500	602	663	135	15
600	600	715	796	150	20
800	800	936	1020	200	30
1000					

Materiał: Żywica poliestrowa nienasycona zbrojona włóknem szklanym z dodatkiem wypełniacza lub polipropylen PP

Aprobata: Instytut Badawczy Dróg i Mostów Nr. AT/2011-02-2770/1